




CONNEX ELECTRIC MOTORS

CSSTFP18-256-20

Stainless Steel * TEFC * Three Phase Motor

NEMA Design B * Premium Efficiency * IP55 Protection * Squirrel Cage AC Motor

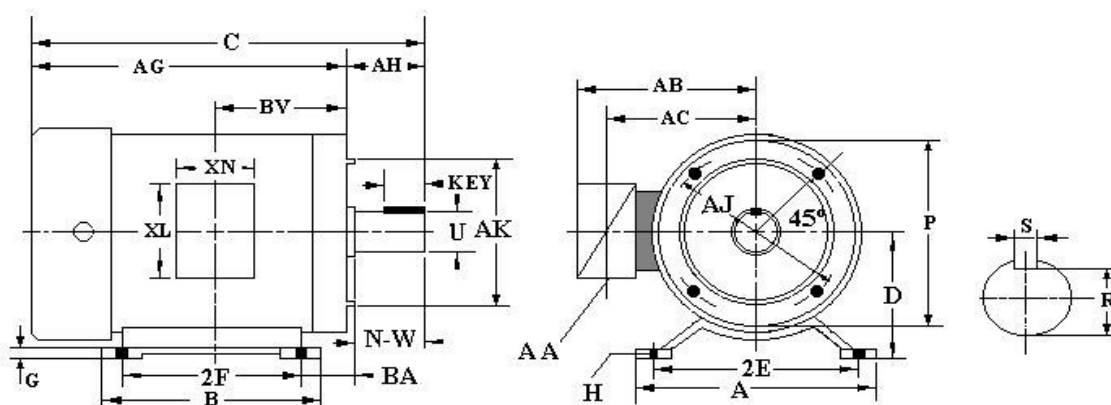

DIMENSIONAL DATA

MOUNTING							CONDUIT BOX					
D	E	2F	A	B	BA	H	AB	AC	XL	XN	AA	
6.25	5	10	12	11.25	4.75	0.53	9	7.8	7	7	1	
	MOTOR						KEYSEAT			BEARING		ENCL.
C	AH	AJ	AK	N-W	BV	U	R	S	KEY	DE	ODE	
25.1		7.25	8.5	4		1.625	1.416	0.375	2.91	6309Z	6309Z	TEFC

PERFORMANCE DATA

50/60 Hz * Class F Insulation * 40°C Ambient * Continuous Duty * 1.15 Service Factor

HP	Frame	Full Load RPM	Efficiency%			Power Factor		Amps@460V		Full Load Torque	Locked Rotor Torque %FLT	Pull Out Torque %FLT	APP. WEIGHT lbs
			100%	75%	50%	100%	75%	Full	Locked				
			F.L.	F.L.	F.L.	F.L.	F.L.	Load	Rotor				
20	256TC	1765	92%	91%	90%	0.88	0.86	24	145	58.3	200%	250%	340
VAC	208-230/460V		INVERTER RATED 10:1										

CONNEX INDUSTRIAL CORP.

4975 AVALON RIDGE PKWY, SUITE 200, PEACHTREE CORNER, GA 30071

TOLL FREE: 1-877-884-2910 TEL: 770-248-9588 FAX: 770-248-9589

www.connex-electric.com